




Rec'd PCT/PTC 16 MAR 2005  
PCT/PTC SE 03/00908

04-06-2003



INVESTOR IN PEOPLE

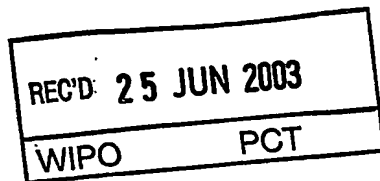

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

*Ansower*

Dated 19 May 2003

PRIORITY DOCUMENT  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

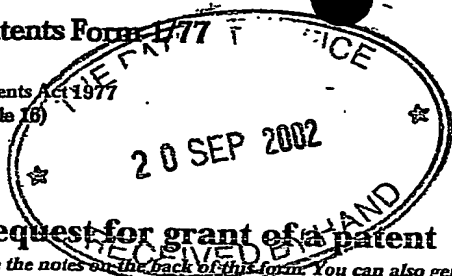

1/77

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

## 1. Your reference

P16866GB-NF/jsd

## 2. Patent application number

(The Patent Office will fill in this part)

0221921.0

22SEP02 E749971-6 000389

P01/7700 0.00-0221921.0

## 3. Full name, address and postcode of the or of each applicant (underline all surnames)

Autoliv Development AB,  
Patent Department Sweden,  
S-447 83 VARGARDA,  
Sweden.

20 SEP 2002

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

SWEDEN

321018006

## 4. Title of the invention

"IMPROVEMENTS IN OR RELATING TO AN AIR-BAG"

## 5. Name of your agent (if you have one)

Forrester Ketley &amp; Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Forrester House  
52 Bounds Green Road  
London  
N11 2EY

Patents ADP number (if you know it)

133001

## 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

## 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

## 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Yes

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

9

Claim(s)

2

Abstract

1

Drawing(s)

1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Yes, Two

Request for preliminary examination and search (*Patents Form 9/77*)

Yes, One

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

☒ We request the grant of a patent on the basis of this application.

Signature

Date

*Forrester Ketley & Co.*  
Forrester Ketley & Co.

20 September, 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Nigel H. FRANKLAND  
(020) 8889 6622

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

*Do not write answers to Patents Form 1/77 in this space*

**BEST AVAILABLE COPY**

PATENTS ACT 1977

P16866GB-NF/jsd

5 DESCRIPTION OF INVENTION

**"IMPROVEMENTS IN OR RELATING TO AN AIR-BAG"**

10

**THE PRESENT INVENTION** relates to an air-bag, and more particularly relates to an air-bag in the form of an inflatable curtain.

15

It has been proposed previously to provide an air-bag safety device for a motor vehicle, the safety device being in the form of an inflatable curtain which, when inflated, extends from the roof-line of the vehicle adjacent the side windows of the vehicle to provide protection for an occupant of the vehicle during a side impact or roll-over situation.

20

Many different designs of inflatable curtain have been proposed in recent years.

25

Some prior proposed inflatable curtains extend to cover only the top part of the side windows, primarily to prevent the head of a vehicle occupant from being displaced to such an extent that the head of the occupant is on the outside of the vehicle during a side impact or roll-over situation. However, it has been found that in some situations the limbs of a vehicle occupant, such as the arms of the occupant, may extend through the side windows during a roll-over situation, with such an inflatable curtain arrangement.

The present invention seeks to provide an improved air-bag in the form of an inflatable curtain.

5        According to the present invention, there is provided an air-bag mounted in a motor vehicle, the motor vehicle having at least one window opening with a lower edge, the air-bag being mounted in position above the said at least one window opening and being configured so that, when inflated, at least two-thirds of the lower-most edge of the air-bag extend beneath the lower-most edge of  
10   the or each adjacent window, the air-bag defining a plurality of inflatable cells.

Preferably when inflated, the degree of overlap of the said lower edge of the inflatable element, and the part of the vehicle beneath the lower-most edge of the or each window opening is between 40 and 100 millimetres.

15

Advantageously the degree of overlap is between 50 and 60 millimetres.

Conveniently a forward part of the air-bag is secured to the vehicle at a first anchoring point and a rear part of the air-bag is secured to the vehicle at a  
20   second anchoring point, the inflatable cells being configured so that a virtual line of tension is created between the anchoring points when the air-bag is inflated.

Preferably the inflatable cells are configured so that the axis of each cell  
25   is substantially perpendicular to the line of tension at least beneath the line of tension.

Conveniently the said part of the air-bag is a strap extending from an inflatable region of the air-bag to the tensioning unit.

5        Preferably the air-bag is provided with a re-entrant slot in the lower edge thereof, the slot being substantially in alignment with one structural post of the vehicle.

10        In order that the invention may be more readily understood, and so that further features thereof may be appreciated, the invention will now be described, by way of example, with reference to the accompanying drawings in which:

15        FIGURE 1 is a diagrammatic view of a first embodiment of an air-bag in accordance with the invention when in the inflated condition, and

FIGURE 2 is a corresponding view illustrating an alternative form of air-bag in accordance with the invention.

20        Referring initially to Figure 1, an air-bag 1 in the form of an inflatable curtain is illustrated. The air-bag 1 is illustrated mounted within a motor vehicle 2. The motor vehicle 2 is provided with a structural "A"-Post 3 extending towards the front of the vehicle, a structural "B"-Post 4 located in the centre of the vehicle between the front and rear side windows, and a structural  
25        "C"-Post 5 located towards the rear of the vehicle. Two side windows 6, 7 are mounted in the vehicle, the front window 6 having a lower edge 8, and the rear window 7 having a lower edge 9. The lower edges 8, 9 of the windows 6, 7 are co-aligned and, in the illustrated embodiment, are substantially horizontal.

The vehicle 2 has a roof-line 10 which extends from the "A"-Post 3 at the front of the vehicle, across the top of the "B"-Post 4 to the "C"-Post 5 at the rear of the vehicle.

5

The inflatable curtain 1 is formed from two superimposed layers of fabric which are secured together around their co-aligned outer edges, and which are also secured together in other regions to define, as will become clear from the following description, a plurality of discrete inflatable chambers.

10

The inflatable curtain 1 has an upper edge 11 provided with mounting lugs 12, the upper edge 11 being configured so that the mounting lugs 12 may be connected to mounting brackets provided in the roof-line 10 of the vehicle. An open gas-flow path 13 is defined within the inflatable curtain 1 adjacent the upper edge 11. Optionally a gas supply duct may be provided within this gas-flow path 13, but no separate gas supply duct is illustrated in this embodiment.

15

A gas generator 14 is provided which is mounted on the "C"-Post 5 of the vehicle 2 and is positioned to inject gas into the gas-flow path 13 of the inflatable curtain 1. The gas generator 14 is securely mounted in position and constitutes an anchoring point that is located at one end of a virtual line of tension that exists when the inflatable curtain has been inflated.

20

At the forward end of the motor vehicle the inflatable curtain 1 is provided with a forwardly extending lug 15 provided with a terminal anchoring point 16 which connects the lug 15 to the "A"-Post 3. The anchoring point 16 constitutes an anchoring point at the other end of the said virtual line of tension.

25

The line of tension is shown as line 17. This is purely a "notional" line, and would not in any way be visible in reality.

5 The inflatable curtain 1 has a lower edge constituted by two-edge regions 18, 19 which are separated from one another by a re-entrant slot 20 which extends upwardly from the lower edge in the region of the "B"-Post 4 to accommodate a "B"-Post mounted safety-belt (not shown). The two lower-edge regions 18, 19 are each located at a position beneath the lower-most edges 8, 9 of the windows 6, 7 of the motor vehicle 2. The distance between the  
10 lower edge regions 18, 19 of the inflatable curtain and the lower-most edges of the adjacent windows should be between 40 and 100 millimetres, and most preferably between 50 and 60 millimetres.

The re-entrant slot 20 in the region of the "B"-Post 4 effectively divides  
15 the inflatable curtain 1 into two inflatable areas 21, 22, with each area being divided into a plurality of separate inflatable cells, such as the cells 23, 24, 25, by means of separating seams, such as the seams 26, 27, 28. In the illustrated embodiment the seams which define the inflatable cells, such as the seams 26, 27, 28, extend to the lower edge regions 18, 19 of the inflatable curtain so that  
20 the cells are effectively "sealed" at their lower-most ends. However, in an alternative embodiment of the invention the seams, such as the seams 26, 27, 28, which define the cells may terminate at a point above the lower edge regions 18, 19 of the inflatable curtain 1, so that there is internal venting between adjacent cells.

25

It is to be observed that the nature of the separating seams is such that, at least below the line of tension 17, the axis of each cell 23, 24, 25 is substantially perpendicular to the line of tension 17.



It is to be appreciated that before deployment, the inflatable curtain 1 is folded and stored within a housing or channel formed in the roof-line 10 of the vehicle 2, so that the inflatable curtain may be inconspicuous. On deployment of the inflatable curtain, in response to a signal from an appropriate sensor, gas will be generated by the gas generator 14 and will flow through the gas-flow path 13 to inflate the discrete inflatable cells, such as the cells 23, 24, 25 in each of the inflatable areas 21, 22 of the inflatable curtain 1. As the cells inflate, so the effective width of the inflatable element in the region extending between the anchoring point securing the gas generator 14 in position, and the anchoring point 16 securing the forwardly extending lug 15 in position will reduce, thus creating the line of tension 17.

Because a substantial proportion of the lower-most edges 18, 19 of the inflatable element extends beneath the lower-most edges 8, 9 of the adjacent window openings, the windows 6, 7 are completely, or at least substantially covered by the inflatable curtain 1, thus minimising the risk of any part of an occupant being ejected through the window during an accident situation. It has been found that the minimum tractable extent of "overlap" of the inflatable curtain, and the part of the vehicle below the lower-most edge of the side window should be approximately 40 millimetres, to provide an appropriate degree of support. A degree of overlap of greater than 100 millimetres may prove to be undesirable, as the inflatable curtain has to be inflated swiftly if it is to provide the desired protective effect, especially in a side impact situation, and any increase in overlap increases the volume of the cells in the inflatable areas, meaning that more gas must be provided to inflate the inflatable curtain, thereby slowing the time to reach full deployment.

The re-entrant slot 20 is provided so that the inflatable curtain may deploy in the desired manner in a motor vehicle in which safety-belts are provided which are mounted on the "B"-Posts at either side of the vehicle. The re-entrant slot 20 does not substantially reduce the effect of the notional line of tension 17. Each of the inflatable areas 21, 22, because of the presence of the discrete cells, will have a certain degree of rigidity when inflated. With each inflatable area 21, 22 having its upper-most edge secured to the roof of the vehicle, and having its lower edge overlapping with the part of the vehicle beneath the adjacent side window, with at least one side edge being secured in position by the anchoring point at the appropriate end of the notional line of tension, the described parts of the inflatable curtain will remain in their intended position during a typical side impact or roll-over situation, providing the desired degree of protection for a vehicle occupant.

It is to be noted that the cells, as exemplified by the cells 23, 24, 25, may have a more "stylistic" or contoured configuration at points above the notional line of tension 17.

It is preferred that the extent of the lower edge of the inflatable curtain, which is overlapped beneath the lower edge of the adjacent window should be at least two-thirds of the total lower edge of the inflatable curtain.

Figure 2 illustrates a modified embodiment of the invention in which like reference numerals are used to indicate like parts. However, this embodiment of the invention is intended for use in a motor vehicle where instead of the safety-belt being mounted on the "B"-Post of the vehicle, the safety-belt is totally integrated within the seat of the vehicle. Consequently, in this embodiment there is no re-entrant slot equivalent to the slot 20 of the embodiment illustrated in Figure 1, because no access is required to the "B"-

Post through the inflatable curtain. Thus the lower edge of the inflatable element 10 is a single integral lower edge 18. Although the gas generator 14 is secured to the "C"-Post 5, as in the proceeding embodiment, in the embodiment of Figure 2 at a point beneath the gas generator 14, the inflatable curtain 1 is provided with an extending strap 30 which is connected to a tensioning unit 31. The tensioning unit 31 is configured to apply tension to the strap 30 as the inflatable curtain is inflating, thus establishing a substantially horizontal line of tension extending between the tensioning unit 31 and the anchoring point 16. The remaining features of the embodiment of Figure 2 correspond directly with the corresponding features of the embodiment of Figure 1 as described above, save that, in the illustrated embodiment, cells 32, 33 are provided which are co-aligned with the "B"-Post 4 of the vehicle, those cells having a volume which is much smaller than the volume of the remaining cells present in the inflatable curtain. Thus the cells only require a minimum amount of gas to become inflated, but still serve to provide protection in the region of the "B"-Post. Thus the cells may provide some protection should the head of an occupant of the vehicle move in such a way that the head may strike the "B"-Post 4 of the vehicle.

Whilst the described embodiments of the invention comprise inflatable curtains formed primarily from two adjacent layers of fabric, it is to be understood that in alternative embodiments of the invention, three or more layers of fabric may be provided to improve the degree of support provided by the inflatable curtain when the inflatable curtain is inflated. If three or more layers of fabric are utilised, the three layers will be super-imposed with one set of cells being defined between the central layer of fabric and one outer layer of fabric, and a second set of cells, off-set from the first set, being defined between the central layer of fabric and the other outer layer of fabric.

In the present Specification "comprises" means "includes or consists of" and "comprising" means "including or consisting of".

5       The features disclosed in the foregoing description, or the following  
Claims, or the accompanying drawings, expressed in their specific forms or in  
terms of a means for performing the disclosed function, or a method or process  
for attaining the disclosed result, as appropriate, may, separately, or in any  
combination of such features, be utilised for realising the invention in diverse  
10 forms thereof.

## CLAIMS:

- 5 1. An air-bag mounted in a motor vehicle, the motor vehicle having at least one window opening with a lower edge, the air-bag being mounted in position above the said at least one window opening and being configured so that, when inflated, at least two-thirds of the lower-most edge of the air-bag extend beneath the lower-most edge of the or each adjacent window, the air-bag  
10 defining a plurality of inflatable cells.
2. An air-bag according to Claim 1 wherein, when inflated, the degree of overlap of the said lower edge of the inflatable element, and the part of the vehicle beneath the lower-most edge of the or each window opening is between  
15 40 and 100 millimetres.
3. An air-bag according to Claim 2 wherein the degree of overlap is between 50 and 60 millimetres.
- 20 4. An air-bag according to any one of the preceding Claims wherein a forward part of the air-bag is secured to the vehicle at a first anchoring point and a rear part of the air-bag is secured to the vehicle at a second anchoring point, the inflatable cells being configured so that a virtual line of tension is created between the anchoring points when the air-bag is inflated.
- 25 5. An air-bag according to Claim 4 wherein the inflatable cells are configured so that the axis of each cell is substantially perpendicular to the line of tension created between the anchoring points.

6. An air-bag according to Claim 4 or 5 wherein a tensioning unit is provided at one of said anchoring points to apply tension to part of the air-bag.
- 5 7. An air-bag according to Claim 6 wherein the said part of the air-bag is a strap extending from an inflatable region of the air-bag to the tensioning unit.
8. An air-bag according to any one of the preceding Claims provided with a re-entrant slot in the lower edge thereof, the slot being substantially in  
10 alignment with one structural post of the vehicle.
9. An air-bag substantially as herein described with reference to and as shown in Figure 1 of the accompanying drawings.
- 15 10. An air-bag substantially as herein described with reference to and as shown in Figure 2 of the accompanying drawings.
11. Any novel feature or combination of features disclosed herein.

## ABSTRACT

5 **"IMPROVEMENTS IN OR RELATING TO AN AIR-BAG"**

10 An air-bag is disclosed for mounting in a motor vehicle (2). The air-bag takes the form of an inflatable curtain (1) and is arranged to be mounted in position above a side window opening (5, 6) in the vehicle. The inflatable curtain (1) is configured so that, when inflated, at least two-thirds of its lower-most edge (18, 19) extends beneath the lower-most edge (8, 9) of the or each adjacent window (6, 7). The inflatable curtain (1) defines a plurality of discrete inflatable cells (23, 24, 25).

